

Assuring PNT
Capability
for Humanity -
an Essential Element of
National Power:
Strategy and Status

Professor/Dr./Col. Brad Parkinson
Chief Designer, Advocate, and Original Development
Director



Let's begin with a very short history of the Origins of GPS

The Design Decisions became essential enablers
for an Explosion of PNT Applications
and a path to explore techniques to ensure
PNT...

**"Black Thursday"
Failure
51 years ago,
August 1973**


Recovery from Failure - Re-Designing the Proposal - ~ 10 Officer/engineers at the "Lonely Halls" Meeting - "Labor Day" Weekend >51 Years Ago. (Saturday 1 Sept. 1973 - Monday, 3 Sept. 1973)



Brad Parkinson
USAF



Steve
Gilbert
USAF

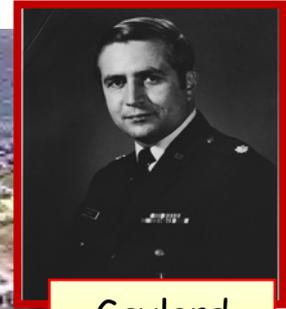

Gaylord
Green
USAF



Mel
Birnbaum
USAF

The Three Fundamentals

Enabled Inexpensive,
Worldwide, 3D Position
plus time

1. CONCEPT -Semi-synch (12 sidereal hour) Satellites

- Simultaneously Measure Range to Four Satellites
- Eliminated need for User's Atomic Clock
- 4D Position
- Global constellation of 24 Satellites

Enabled Unlimited Users
and Accuracy to a Pencil
Lead (differential) + J/S >
41 dB (12,000 to 1)

2. PASSIVE RANGING SIGNAL DESIGN:

- Code-Division Multiple Access (CDMA) - - accuracy and jam resistance
- All Satellites on the same frequency, Code and Underlying Carrier are phase locked. RTK gives dynamic accuracies of a few centimeters

3. Orbiting, Hardened, Space-borne Atomic Clocks enabled accurate predictions of 4d satellite location - greatly reduce ground dependency

- Nominal 12 Hour clock updates
- Predictions good for weeks of clock drift

Enabled extended
Autonomous Satellite
Operation (If Ground
control failure)

Gained Approval for Full-scale, Phase One Development - Dec. 1973


- First launch of GPS February 1978 -
44 months after contract award.
- By 1979, Extensive testing confirmed all capability promises made in 1973...
- Full Operational Capability (FOC) on
April 27, 1995 (21 years after Phase 1
Approval)

Three Critical Events Accelerated GPS Acceptance and Applications

1. Pres. Reagan Guarantees GPS to the World (1983) Due to shutdown of KAL007.
2. Pres. Clinton orders Deliberate Civil errors (S/A) turned off on May 1, 2000.
3. Integrated Chips drove GPS receiver cost to less than \$5 and # of Channels >100.



Installed and Projected Base of GNSS Devices by Region

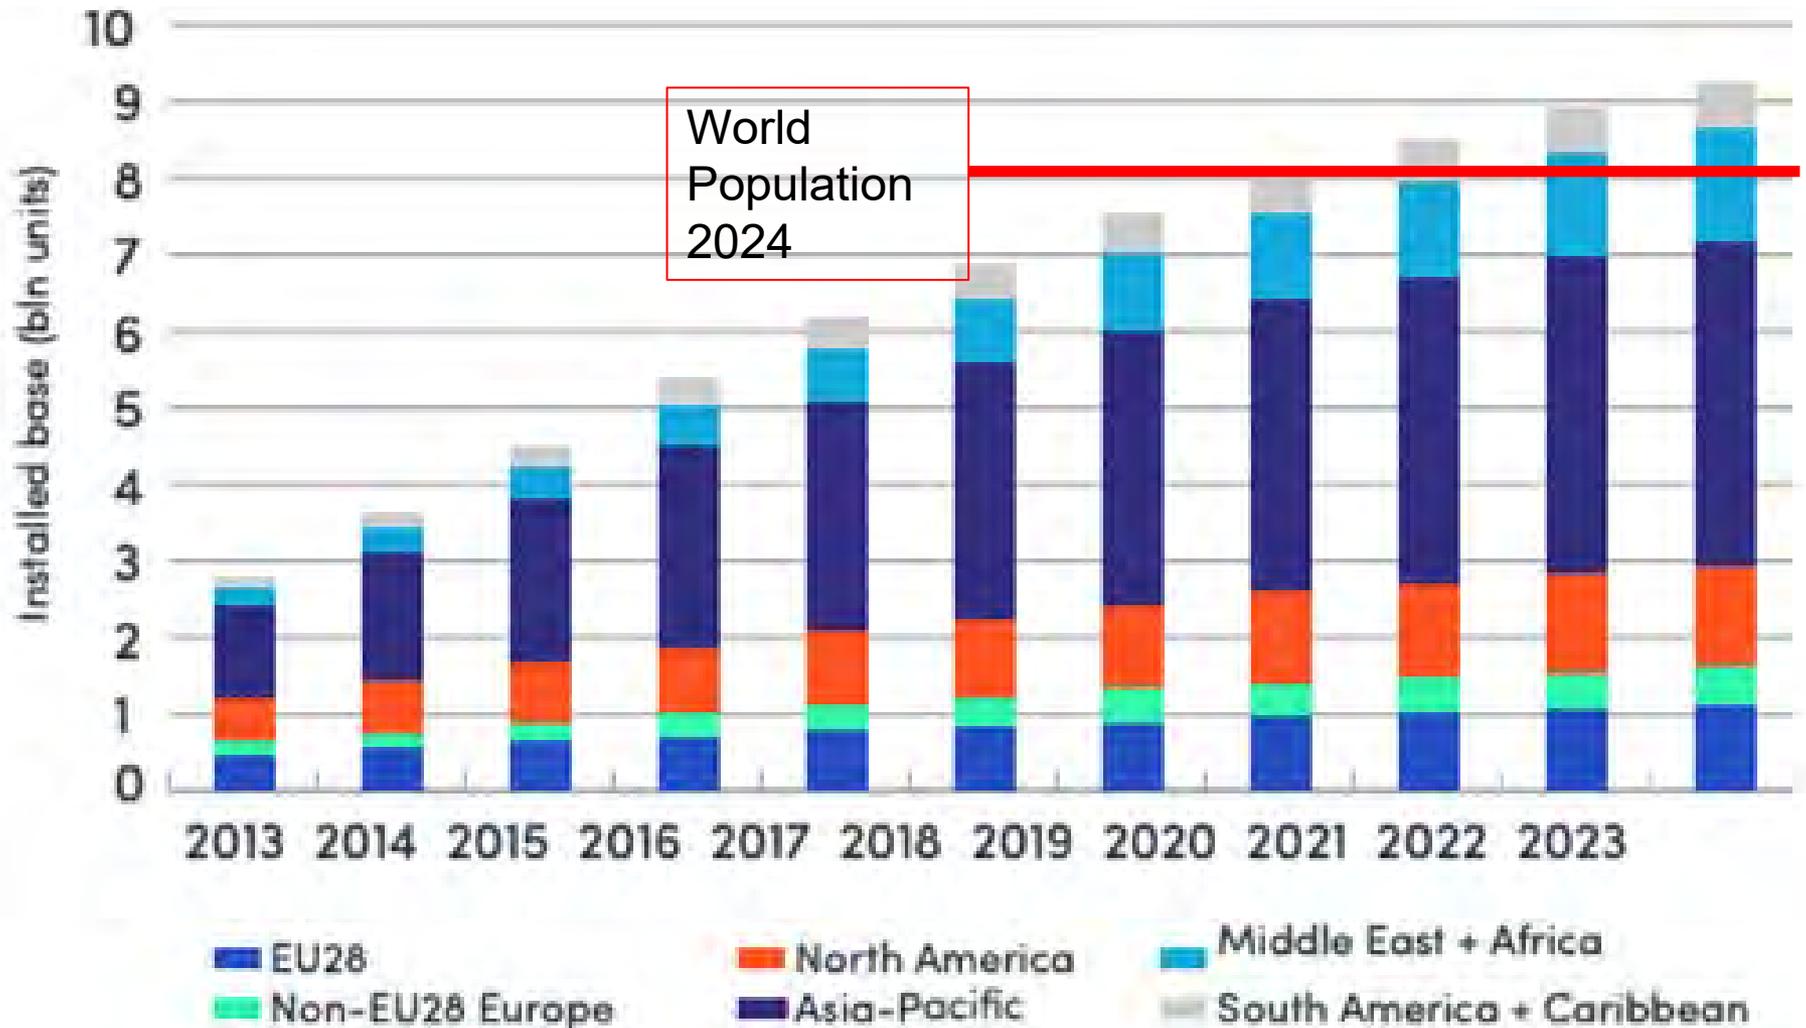

Source: GSA GNSS Market Report 2015 Issue 4_0, March 2015.

Reminder: Prerequisites for GPS/GNSS contribution to Assured world-wide PNT - If 3D and time are required:

Clear and truthful Passive Ranging to ≥ 4 Satellites

- Must have Line of Sight to "enough" GPS/GNSS
 - For sky-impaired (large shading angles), need densification
(GPS+ Galileo+ GLONASS +BeiDou)
- Must be able to accurately measure range
 - Overcome local interference
- Must ensure Integrity of received signals
 - Self- integrity (RAIM/ARAIM)
 - External rapid-checking
(e.g. WAAS, Egnos, MSAS)
 - + (potentially) NASA's GDGPS

Civil Report Card On GPS Performance Feb 2025

A Tribute to the Space Force Operators (2 SOPS)

FAA Continuously Monitors
GPS in the US.

In 2024, Median Horizontal
accuracy of "Raw" GPS :
3.52m (95th Percentile)

Operational Performance Parameter	CY 2024	Jan 2025	Feb 2025	Long term	Short term
Availability Parameters					
Average Number of satellites usable	30.71	30.28	30.97	↑	↑
Average number of satellites usable in primary slots	23.78 (99.08%)	24.00 (100.00)	24.00 (100.00)	↑	↔
Average availability of 6 satellites in view	100%	100%	100%	↔	↔
99.99% Horizontal DOP					
Area Median	1.29	1.31	1.28	↑	↑
Worst Site	4.54	2.36	3.74	↑	↓
99.99% Vertical DOP					
Area Median	2.26	2.38	2.32	↓	↑
Worst Site	9.85	5.03	9.87	↓	↓
99.99% Position DOP (PDOP)					
Area Median	2.57	2.67	2.59	↓	↓
Worst Site	10.50	5.45	10.56	↓	↓
100% RAIM Availability (HAL=185m)					
NPA Service Area (NSA)	76.12%	86.21%	96.95%	↑	↑
World	78.14%	79.35%	83.91%	↑	↑
Accuracy Parameters					
RMS Single Frequency User Range Error					
Constellation Median (m)	2.41	2.50	2.44	↓	↑
Worst Satellite (m)	18.54	29.01	29.31	↑	↓
95% Horizontal Error					
Area Median (m)	3.52	3.38	3.45	↑	↓
Worst Site (m)	15.12	11.79	12.27	↑	↓
Availability (% <4.5m (historical 3-sigma))	95.96%	95.62%	95.96%	↔	↑
95% Vertical Error					
Area Median (m)	5.30	7.18	5.89	↓	↑
Worst Site (m)	12.78	10.57	11.30	↑	↓
Availability (% <9m (historical 3-sigma))	98.68%	97.78%	99.02%	↑	↑

Key: ↑ improving ↓ worsening ↔ no significant change
Long Term is current month vs. prior 12 months; Short Term is current month vs. prior month

The 4th Dimension: Time Synchronization



- Many “hidden” applications for precise time-
Power Grid, Stock Mkt, Banking, Cell Phone towers...
 - Requirements millisecc. ($10^{-3}s$) to nanosecc. ($10^{-9}s$).
 - Some need synchronization to
Universal Coordinated Time (UTC) -
 - GPS distributes UTC time ~10 to 25 nanosecs.
 - GPS Synchronizes to 2-15 nanosecs. (“Commonview”)
- Most references are implemented with GPS and a
flywheel clock - frequently Rubidium Atomic.
- Major efforts to find timing augmentation to GPS,
creating “uninterruptable” sources

Categories - "Assured PNT" - How should "assured" be interpreted?

User Requirements for GPS PNT:
Accuracies/Dimensions/Integrity/Jamming
Resistance

Vary Greatly by Application -
So "Assurances" can be quite different, depending
on application.

Let us Define 5 Broad
PNT Capability/Requirement Categories
To help assess "Assurance" solutions ...

Five PNT Capability Categories

	C	B	A	S	T
User Category	General 3D Dynamic	Precision 3D Dynamic	Ultra-Precise 3D Dynamic	Survey Class Static	Time Sync & Transfer
Horizontal Accuracy	25 Meters 95th Percentile , Dynamic.	2.5 Meters 95th Percentile Dynamic	10 cm. 95th Percentile Dynamic	1 cm- 0.1mm Static	Time: microsec to nanosec
GPS Technique	"Raw" <u>GPS</u>	<u>Differential GPS</u> (Local, or Continental [WAAS] GPS "Reference" Receivers)			
		WAAS Corrected	RTK	Base Station	Master Reference
Examples	Cell Phones, Watches, Autos	Aircraft Landing	Real-Time Kinematic (GIS, Auto Farming, Machine control)	Survey Class, Plate Tectonics	Banking, Power Grid

Summarizing: "Assured" PNT solutions
depend on User Needs:
Categories of User PNT Capabilities/Requirements

- **Cat A (RTK, 10 cm or better, 3D)** (carrier-tracking differential) -
Dynamic User, -up to 10^{-5} Integrity can use RAIM and ARAIM
- **Cat B (WAAS integrity and Accuracy corrections, ~2.5 meters, 3D,.)**
Dynamic User, up to 10^{-7} Integrity.
- **Cat C (unaided GPS ~25 meters 95th percentile worst location, 3D/2D?).**
Dynamic User, Ionospheric model.
- **Cat S (Survey/Scientific)** -Static User, Averaging over time.
Accuracies: **sub centimeter to sub millimeter**
- **Cat T (Time)** Static users. **Nanoseconds to Microseconds**
Many with local flywheel atomic clock


> 60 Example Applications: **Categories A,B and S – (RTK & High PNT Precision) in Red--**

Group	Example applications
Aviation	Area navigation, approach, landing up to Cat III, NextGen
Cell Phones	Used for many other apps – Automotive, Tracking et al.
Agriculture	AutoFarming: crop spraying, precision planting, yield assessment
Automotive	Turn-by-turn guidance, OnStar, driverless cars
Emergency and Rescue Services	911, ambulance, fire, police, rescue helicopters , emergency beacons, airplane and ship locaters, OnStar
Intelligent Transportation	Train control and management, UAVs, Intelligent Highways
Military	Rescue, precision weapon delivery , unit and individual location
Recreation	GeoCaching, control of models, hiking, outdoor activities
Robotics & Machine Control	Bull dozers, Earth graders, mining trucks, oil drilling, Container ship loading, Urban UAV control, Snowplow control
Scientific	Earth movement and shape, atmosphere , weather forecasting, climate modeling, ionosphere, space weather , tsunami warning, soil moisture, ocean roughness, wind velocity, snow, ice, and foliage coverage,
Survey and GIS	Mapping, geographic tags , environmental monit., disease outbreaks
Timing	Cell phone towers, banking, power grid
Tracking	Fleets, assets, Space Satellites, equipment, shipments, children, Alzheimer's patients, wildlife, animals, law enforcement, criminals,

Examples of PNT Categories A, and B (dynamic users):
 Applications mostly need 3 dimensions-**Accuracy** down to 0.04 cm. and
Integrity - better than one HMI error in 100,000 -
 (one HMI fault in 10,000,000 for precision aircraft landing)



Machine Control to 2 inches

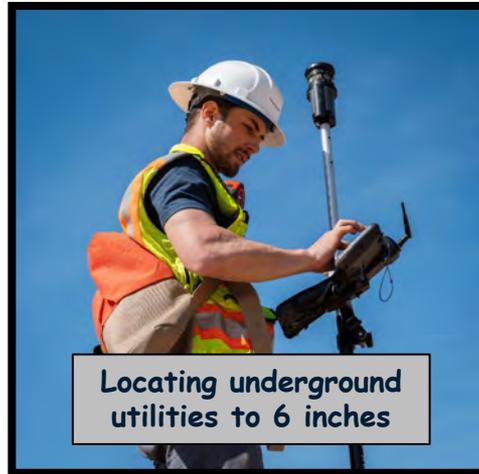

Locating underground utilities to 6 inches



Land and Maneuver BVLOS 3D and a few feet



Autofarming - 2 inches



Positive Train Location (PTL) a Train Positioning System better than 4 feet, integrity of 99.999999997% (10 nines), Defining train length and track discrimination.

Automatic unloading of Container ships - inches



Over 4,476 LPV (GPS Based) approaches, Old 1,550 Cat I ILS approaches - Ratio About 3:1.

Economic Value and National Power

National Power Elements Typically Include:

- Population,
- Geography,
- Natural Resources,
- Political Stability,
- Leadership,
- Diplomacy,
- Cultural Influence.

GPS



- Military Capability,
- Technology,
- **Economic Strength,**
 - Direct Benefits
 - Impacts when not available

Economic Value and Loss Impact -

at least 3 major studies on GPS economic value

- RTI International (Sponsored by NIST, 2017) valued GPS at \$1.4 Trillion since its inception.
 - **Extrapolating to 2025, the current cumulative value of GPS to the US is over \$2 Trillion.**
- In 2017, RTI estimated impact of GPS loss at about **\$1 Billion per day.**
 - (UK study reached nearly same impact for UK)
 - Agriculture was so dependent on very precise GPS (Category A), loss would balloon to **\$1.3 Billion per day** during the critical planting season.
- **Both Value and Loss Estimates heavily driven by Categories A and B GPS users.**
- **Clearly, Assuring PNT is a high priority goal for the economy, for infrastructure and for safety**

Others have Recognized Power: There are now 4 Global Navigation Satellite Systems (GNSS) -
All use the GPS design: the Digital Signal, 4 satellite Solutions and Spaceborne Atomic Clocks

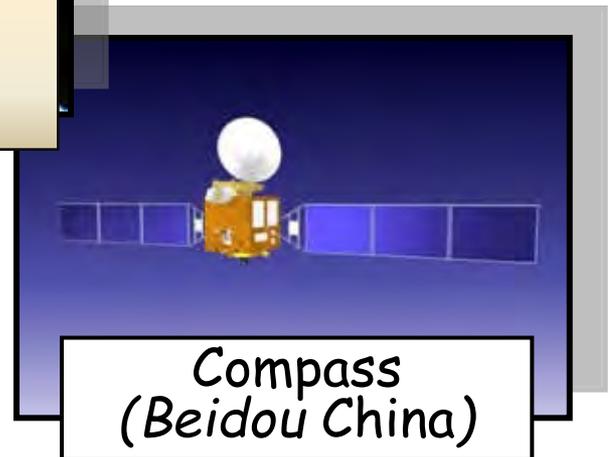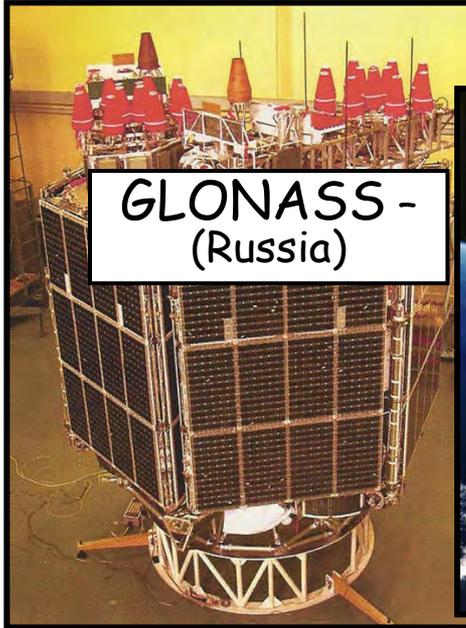


Typically about 30 GNSS satellites above the horizon-
and about 10 different types of signals available from each - Over 200 signals potentially in view

Example of available signals.

Typical Skymap at San Luis Obispo, CA (31 sats in view)

Each satellite is broadcasting multiple signals

Most cell phones now use all - PNT Category C

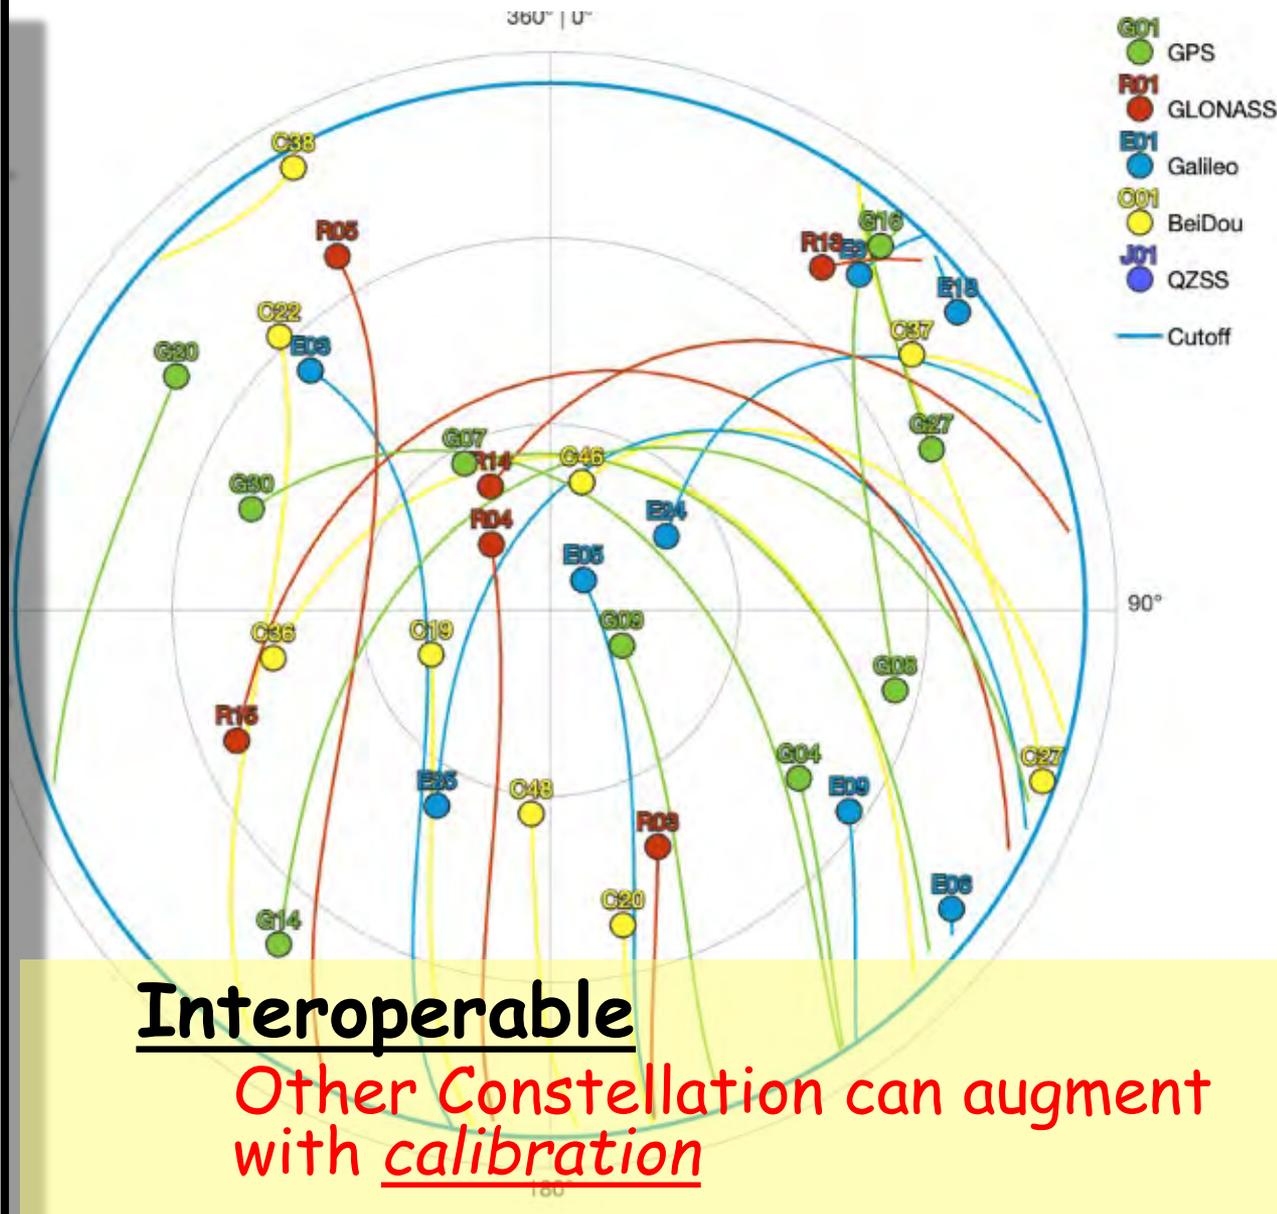

Major Threats to the Availability of Assured PNT from GPS/GNSS

- Signal Interference
 - "Jamming" - Natural, Inadvertent, or Deliberate
 - "Spooing"  Denial
- Physical Attack
 - Satellites
 - Ground Control and Infrastructure
- Cyber Attack - System or Receivers
- Operator Errors - e.g. erroneous uploads to satellites

GNSS Interference Detection using ADS-B

Select Date (UTC)

2025/04/09



SUBMIT >


Persistent GPS interference
(measured by ADS-B) in certain areas-
Locations where accuracy is not
guaranteed at least ~1/4 mile. (NIC <7)

- Less than 1 % of Worldwide flights are involved.
- Armed Conflicts and Fishing Grounds?
- Over half are light, single-engine aircraft.

Daily snapshots on
<https://waas-nas.stanford.edu/>

Level of GPS interference

- Low 0-2%
- Medium 2-10%
- High > 10%

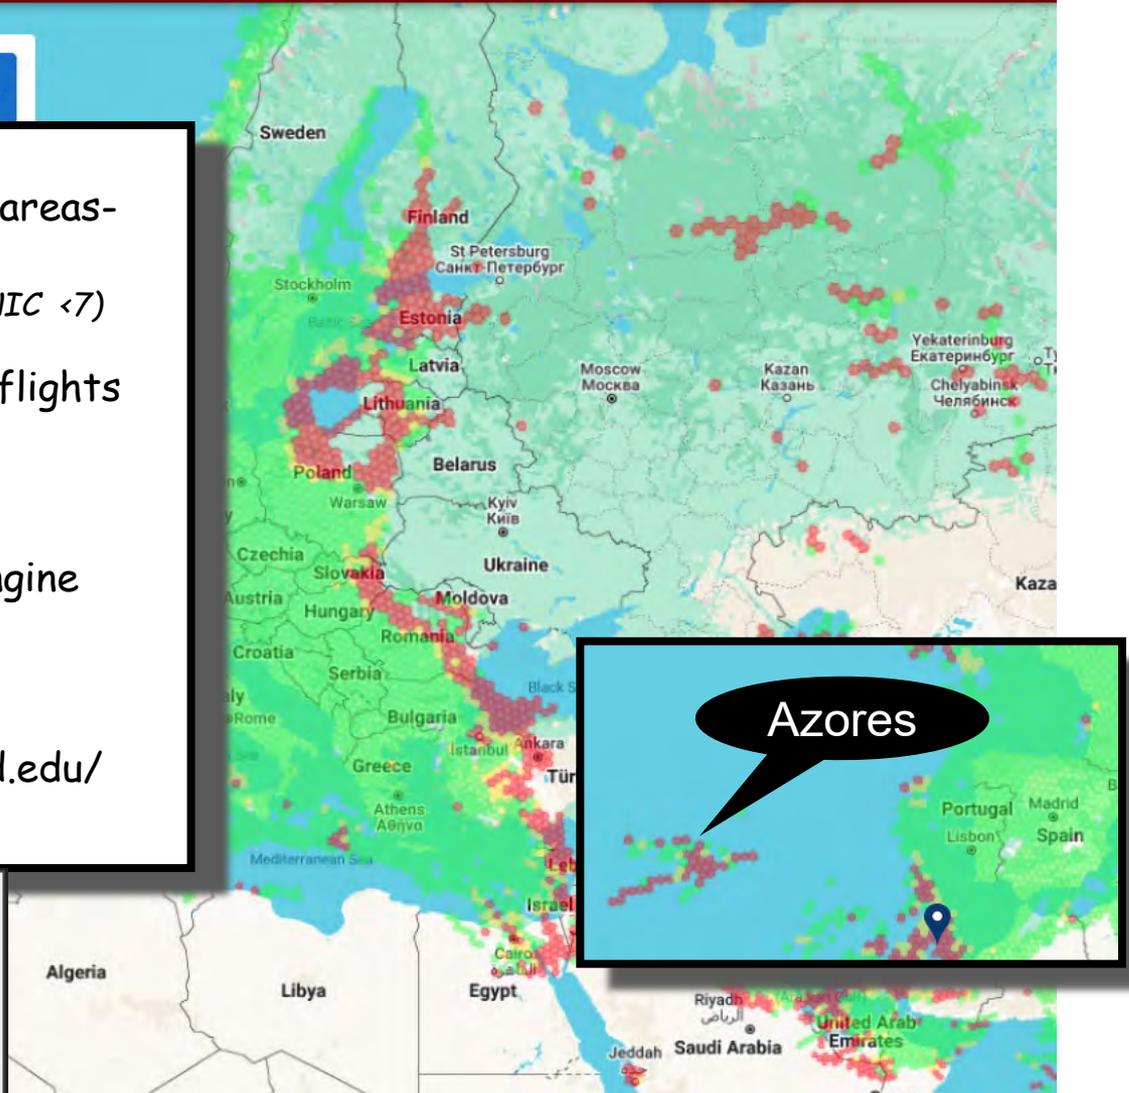

Media Responses

- Headlines: GPS vulnerable!

- Jamming
- Spoofing
- FCC Allocation Blunders

- Pursuit of Augmentations:

“We have to find a replacement/backup”

- A reasonable activity - Studied for over 20 years (e.g. FAA-DME)

But, Current PNTAB Assessment:

“No current or demonstrated alternative to GNSS-type systems (Primarily GPS) can deliver equivalent dynamic/static accuracy (to millimeters, 3D), integrity and worldwide 24/7 availability.” (Particularly Categories A and B)

- **Conclusion: We must also allow and encourage deploying well-established solutions to toughen GNSS-based PNT.**

i.e., Make GPS more Robust and Resilient

Outline: PNT AB Strategy:

PTA - **P**rotect, **T**oughen, and **A**ugment GPS to ensure that it **continues to provide Economic and Societal Benefits**

- **Protect** the Clear and Truthful Reception - **7 steps**
 - 3 Pre-actions - Legal/Law Enforcement/FCC
 - 4 Re-actions when interference/spoofing occurs - DOD/DOT/DHS/FCC/FBI/DOJ
- **Toughen User's Receivers**
 - **Diversify** - All GNSS signal receivers (with vector feature and acceptable integrity)
 - **Increasing Jam resistance** - use well established techniques
- **Augment** or substitute PNT sources
 - **Densify and Diversify** satellites -
 - Use All Signals/Constellations but With adequate integrity
 - **Non-GNSS PNT Sources**

First Strategy Area : Protect.

- Protect the Clear & Truthful Signal-
 1. Pre-actions -before interference occurs - Legal/Law Enforcement/FCC:

Protect Spectrum/Enact strong Penalties/suppress
Jammer sales

Assured Availability
of PNT - "PTA"

Protect the Clear and Truthful Signal- 2. The Reactions - "DIEP"

D. Detection -
Rapid Location of
Jammed Receivers



I. Identification &
Location of Jammer
within < 2 hours



E. Physical
Elimination of the
Jammer



P. Prosecution
of the
Offender



Work with DOT and Enforcement to improve timeliness and
accuracy of interference identification


(e.g. crowdsourcing, every cell phone a detector?)

"Develop means to detect, measure, locate, and mitigate radio
interference or jamming in support of the National Security
Infrastructure."

GIDL: GENERALIZED INTERFERENCE DETECTION AND LOCALIZATION SYSTEM (A real example)

Professor Dennis Akos et.al.

Experiments by Colorado University and Polish Maritime Institute

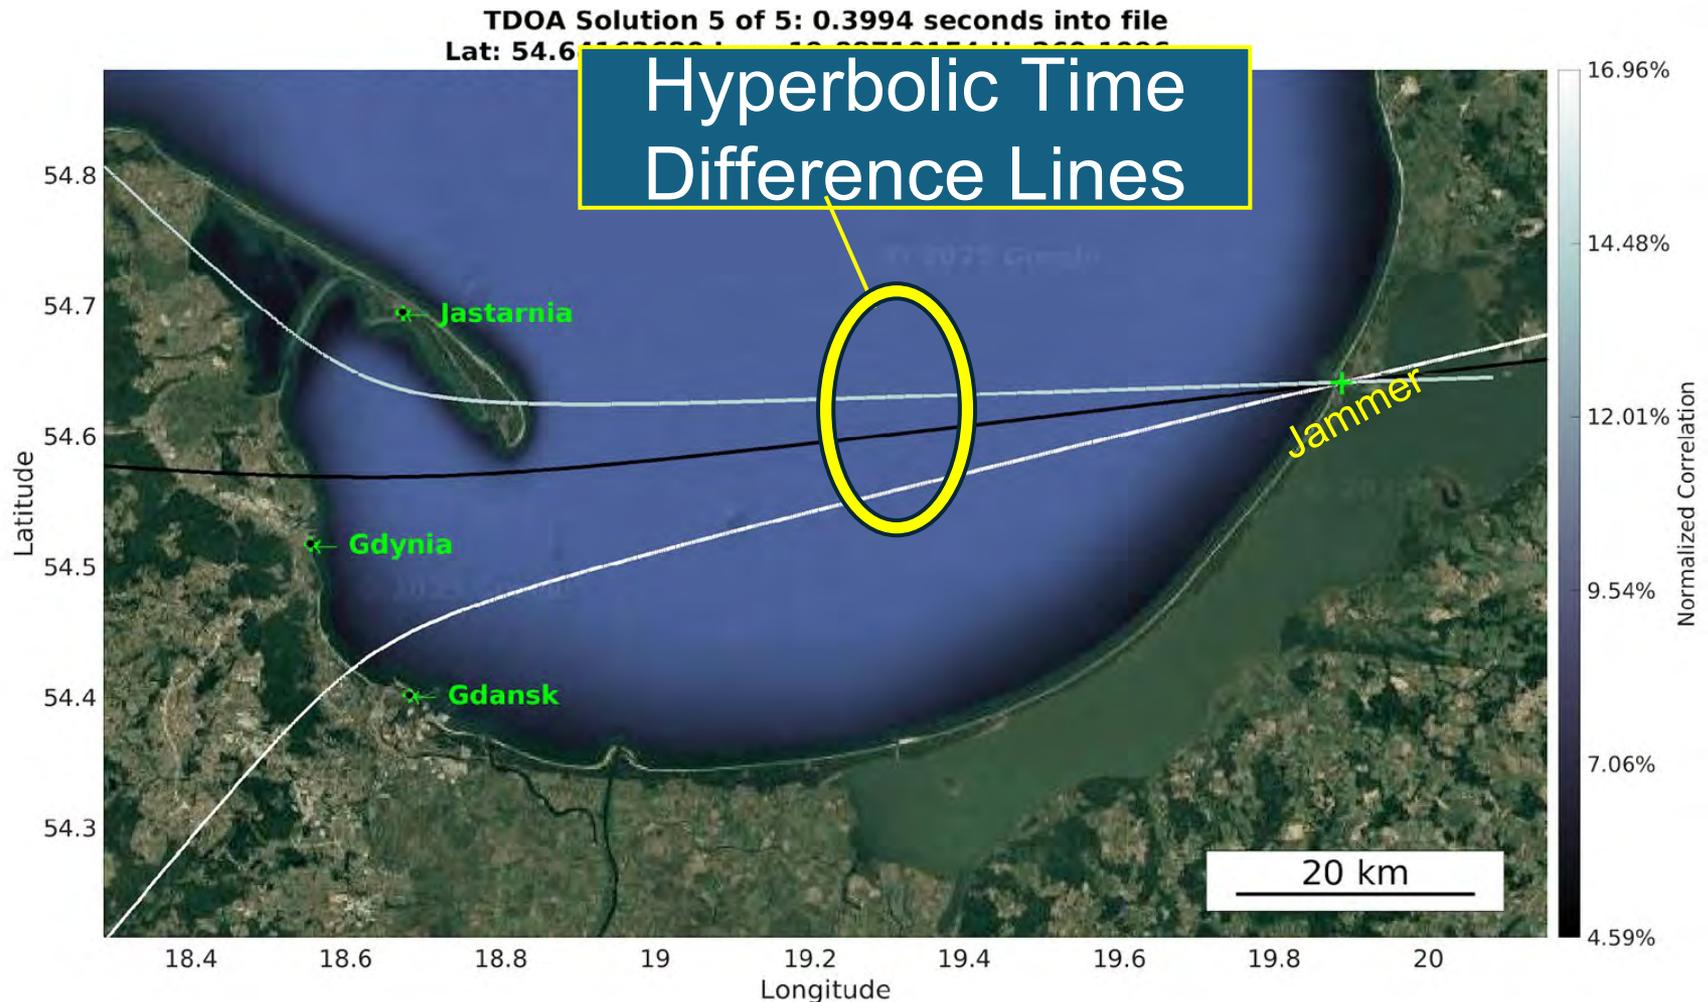

Strategy #2 of PNTAB Toughen

- Toughen GNSS Users' Receivers
 - Employ multiple, well-known techniques to ensure spoofing can never create HMI
 - Increase Jam resistance -
use demonstrated receiver A/J techniques
 - Diversify - use All integrity-certified GNSS signal receivers (with vector feature)
 - Toughen Constellation by proliferating low-cost satellites

Existence Proof from 47 years ago:
Rockwell Collins (now BAE) GDM (1978)
One of the Phase One User Sets



Unaffected flying over 10kW of jamming at 10,000 feet.
Demonstrated over 100 dB of J/S!
(J/S = 10,000,000,000. - 10 Billion to One)

Main "Toughening" Techniques. (Factors Multiply)

Basic C/A receiver J/S factor of ~2,500 (full state 5)

- **Group 1: Signal Processing**

- Tracking mode
- Narrow Filtering
- Vector Processing

Additional J/S factor of ~10

- **Group 2: Inertial + Very Stable User Clocks**

- MEMS - up to hi-grade IMU
- Quartz to CSAC

Additional J/S factor of ~31

- **Group 3: Controlled Reception Pattern Antennas (CRPAs)**

- Elements/Footprint - (4, 7, 19, Many)
- Beam/Null steering or combinations

Additional J/S factor of up to ~1,000,000

- **Group 4 Satellite type Augmentations:- may require Receiver Mods.**

- Additional GPS Satellites (Also a defence against anti-GPS satellite attacks)
- Additional Signals and Frequencies (L5, L2C, L1C,)
- Additional GNSS Constellations (Galileo)
- Earth Coverage Power Increases
- Regional Gain: Satellite Beam Antennas/RMP

Additional J/S factor of ~14 - Similar to "M" Code

Receiver Toughening


L5 Authorized and planned over 26 years ago

- White House Announcement -
January 25, 1999 :



“The third civil signal will be located at 1176.45 MHz, within a portion of the spectrum that is allocated internationally for aeronautical radio navigation services and will be implemented beginning with a satellite scheduled for launch in 2005. ”

- But message still set **“Unhealthy”** (April 2025)

Additional J/S (Jammer Attenuation) Factor by Using 3 Ring version (19 Element) Phased Array (Against three Jammers on horizon)

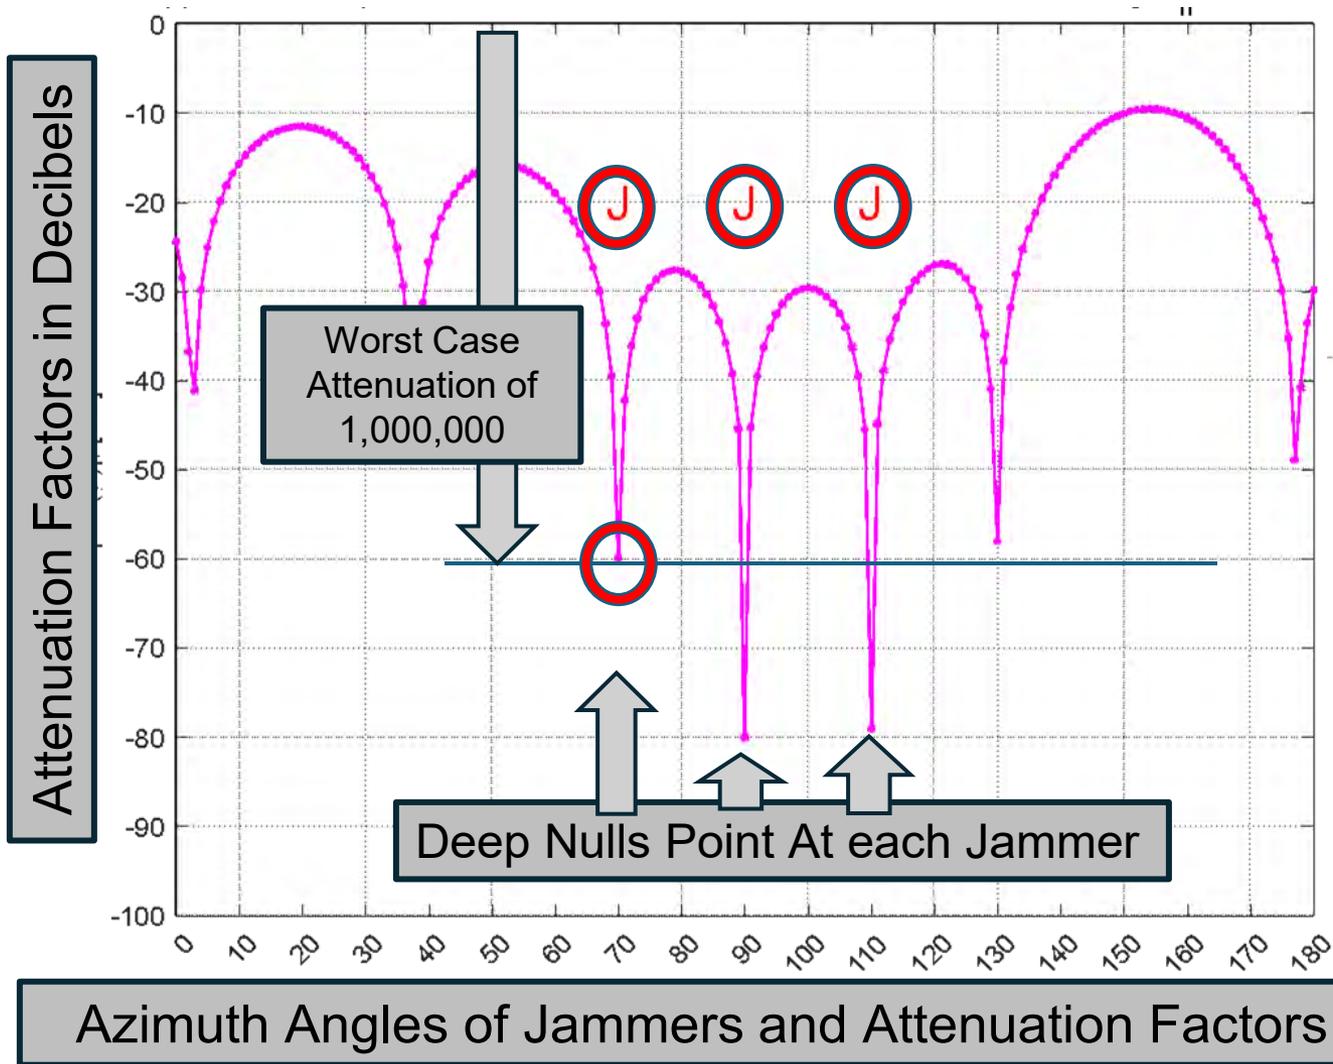


Possible Antenna Configurations
(1 to 91 element)

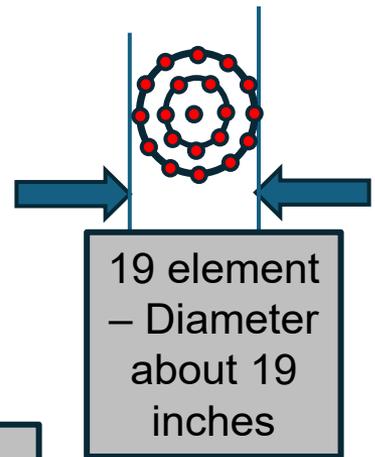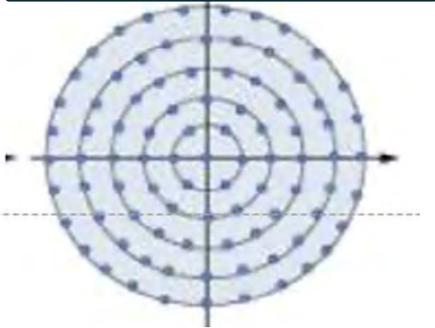



Using L5, Inertial aiding, and Digital Beam/Null-steering Antennas

Denial Range of a 1 Kilowatt GPS Jammer - Located on top of National Housing Center



**19 Element -
48 cm
diameter - ~19"**

**Today: Aircraft L1 C/A Receiver
Single Element GPS Antenna-
Jammer Located on the
National Housing Center
Denies Full Accuracy out to 560
Km- 350 miles (LOS)**

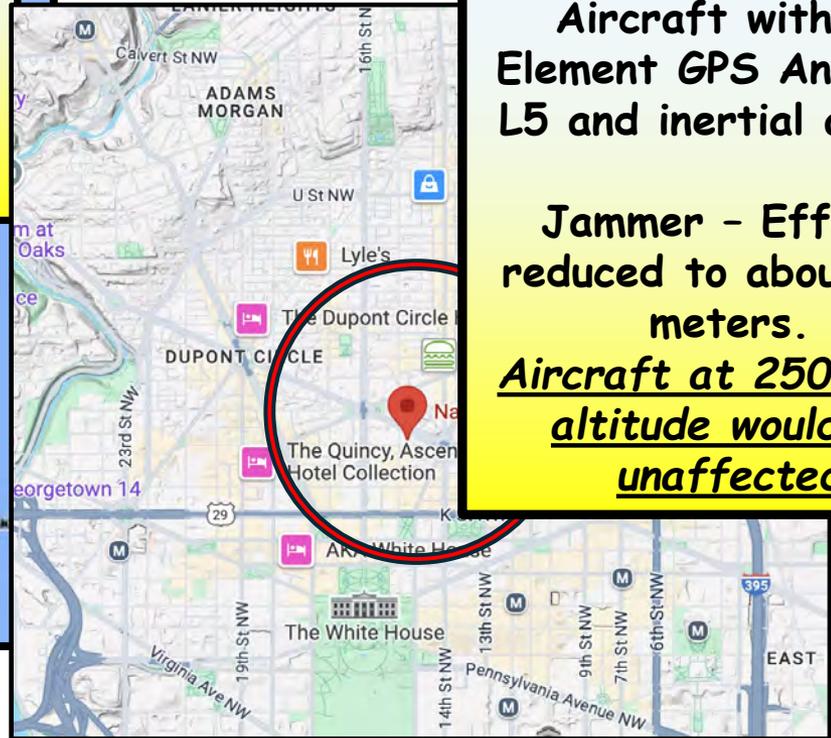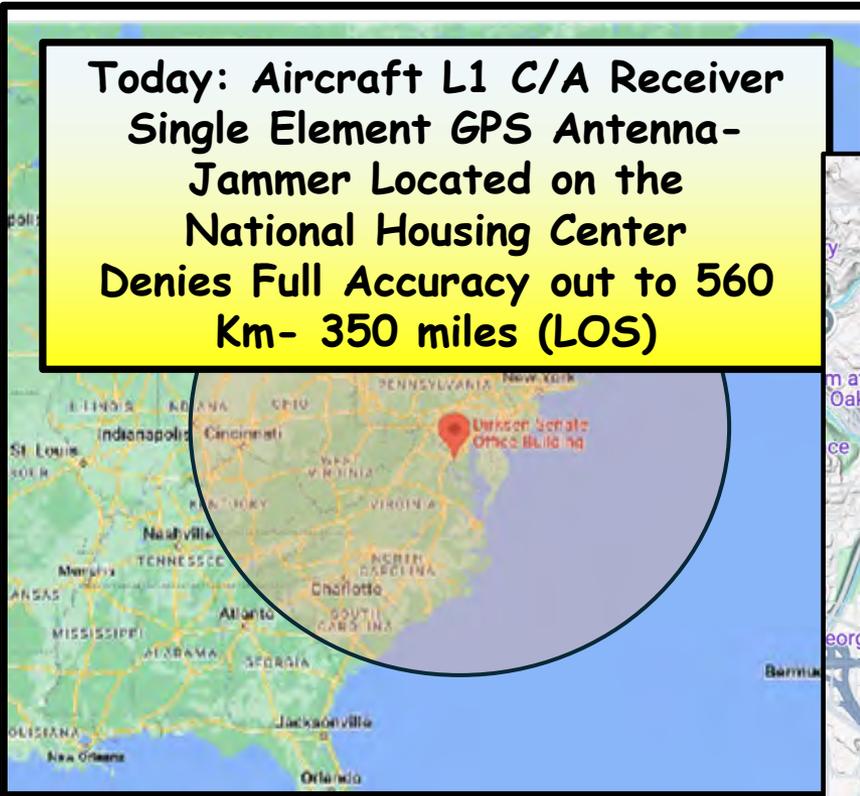

**Aircraft with 19
Element GPS Antenna,
L5 and inertial aiding.**

**Jammer - Effects
reduced to about 600
meters.
Aircraft at 2500 foot
altitude would be
unaffected**

Caution:

Are civil GPS receivers currently available in the US with these types of Antennas?: NOT YET

- US ITAR has forbidden more than 3 elements in US civil GPS antennas (*hopefully eliminated soon!*)
 - Although the technology at L band (radars) has been known and used for over 60 years
 - Inexpensive A/D devices are off-the shelf
 - A Turkish company (TUALCO) is selling a GNSS antenna with 16 elements
(and claimed at least 100,000 times improved Jam resistance above GPS natural resistance of 2,500 J/S)

TUALAJ 16300
CRPA GNSS ANTI-JAM SYSTEM



Selected Recommendations to Toughen

- Remove all restrictions on Phased Array Antennas for PNT
- Gain formal authorization to use all GNSS that have Satisfactory Integrity
- Develop Industry (ICAO?/RTCA/RTCM) standards for improving Interference resistance
 - Deep Inertial integration
 - Directional antennas
 - Vector Receivers (All GNSSs)
- **Foster and help stimulate Manufacturers to develop and offer interference resistant GPS receivers, especially for safety-of-life applications such as commercial air, positive train control, and maritime."**
- Encourage users to move to tougher receivers

Strategy #3 of PNTAB - Augment

- Augment or substitute PNT sources (>TRL 6)
 - Use additional GPS Signals L5, L2C, L1C
 - Densify and Diversify with GNSS satellites -
Signals/constellations
 - Independently verify integrity
 - Worldwide Integrity Monitoring
 - Use Complementary PNT Sources -
e.g. LEO-Comm, DME, eLoran, TV signals, Optical fiber
- Note: There are some intriguing new LEO Proposals that are not yet demonstrated as a system (TRL less than 7) such as Xona (cooperative) or Starlink (signal of opportunity)

Repeat Strong Caveat: All "Augmentations" should have careful estimates of Integrity - i.e. how often is the signal untrustworthy?

eLoran Characteristics

Characteristic		eLoran	
		Non-Differential	Differential
System Availability		Regional	Local only — e.g. Harbor Area
Accuracy	Horizontal	50m to >500m	10m to 20m
	Vertical	No Vertical (Use Baro?)	
Time to First Fix		1 to 2 Minutes (?)	
Vulnerability to Interference		Nearly Invulnerable	
Cost		\$20 + Display& Ant	\$20 + Display& Ant

- Un-jammable. (virtually)
- Regional – But not currently deployed in US
- Horizontal Only. No third dimension (Baro.?)
- Accuracy over landmass subject to time delay variability
Speed of light - variations up to $\frac{1}{4}$ mile at longer range
- Can Achieve 10/20 meter differential accuracy in small areas
(within about 5 miles of calibration point) must use continuous updates of Differential Corrections
- Time transfer Differential test data ~ 0.1 μ sec (GNSS Reference)

Aside: Can eLORAN be configured to be one-way ranging?

LEOs - Altitudes of ~200 to- 1000 n.mi.

Promising PNT augmentation systems in various states of development

- Main categories: 1. ComSat with/wo dedicated Nav signal or
2. dedicated Navigation Satellites
 - Major issues include funding the development and operations
- Tougher than GPS (without phased-array antenna):
Up to 1000 times received GPS power
- Smaller single satellite coverage area requires more satellites
(typically about 250 for 4 in view)
- Direct Ranging +
 - Doppler positioning can be used - gives 3D with 2 satellites but requires accurate user velocity. Also Doppler is less precise
- Iridium claims ~20 meters 2D and "indoor" reception
- **Needed: independent testing and assessment, including accuracy, integrity, and quantifying resistance to jamming.**

Augmentations to be Compared

(TRL 7 or Greater. Some promising Augmentations [e.g. Xona, Trustpoint] not yet at TRL-7)

- Additional GNSS Signals
 - GPS: L5, L2C, L1C
 - Other GNSS: Galileo, Beidou, GLONASS + Regionals)
 - GNSS with Regional Integrity/Correction Feature: WAAS (FAA), EGNOS (EU)
- LEO Satellites (Principally COMs, some proposed as dedicated)
 - With Tailored NAV signal (e.g. Iridium/Satellis)
 - Signal of Opportunity
- Inertials: Fly-wheeling with GNSS, Standalone
- eLORAN
- Cell Towers
- TV Stations

Using PNT Categories (ABCST) to Compare Augmentation Techniques: Four Key Comparisons -

1. Number of Dimensions Measured
2. Integrity - Samples for a single undetected hazardous fault (HMI)
3. Accuracy
4. Robustness - 1 kW Jammer's expected range

Color Key:

Meets Cat
A&B


Between
Cat B&C

Meets Cat
C

Does not
meet Cat C

Cat T

Dimensions Measured by Demonstrated Systems

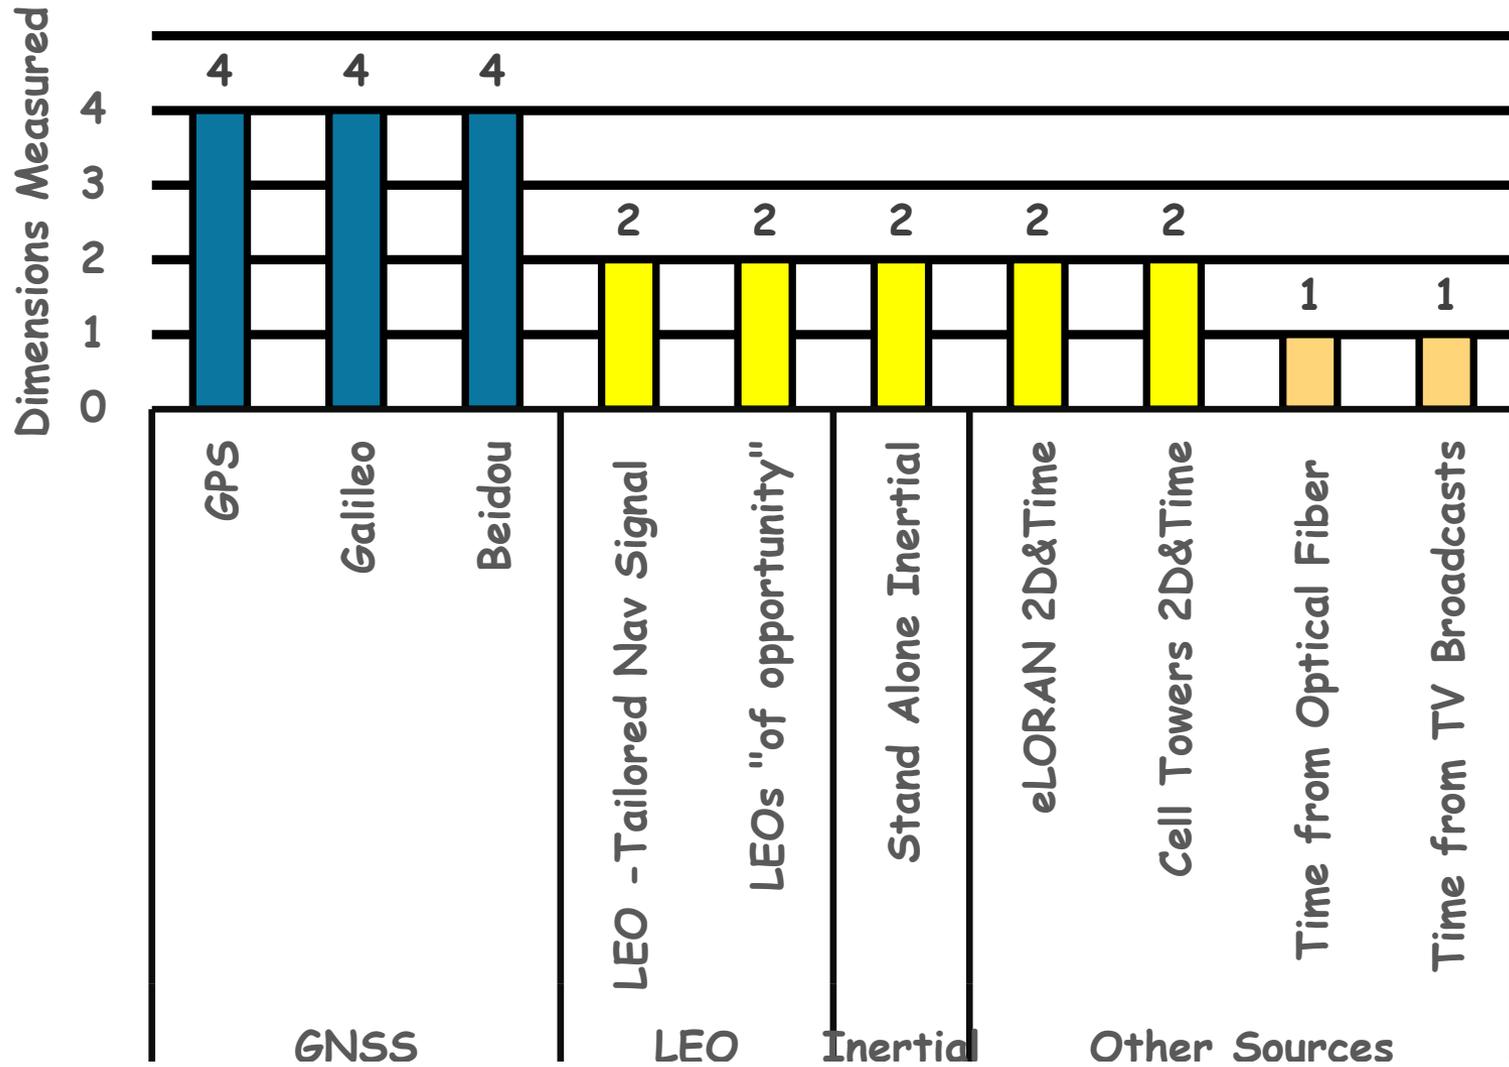


Preamble to Integrity Comparison:

Emphasizing - *For many uses (e.g. Aircraft and Safety of Life)*

Availability and Accuracy of the signals is insufficient

Integrity also must **be certified** for

adoption



Integrity:


- Probability that expected accuracy is not exceeded - Example - Cat III Aircraft Landing - better than 10^{-7} .

[Hazardous or Misleading Information not more


often than Once in 10 million cases]


- Can be estimated with help from WAAS and/or
- Using RAIM - Receiver Autonomous Integrity

– “Continue to implement ARAIM & inertial for Integrity (+WAAS/EGNOS/MSAS + ...)” (PNTAB)

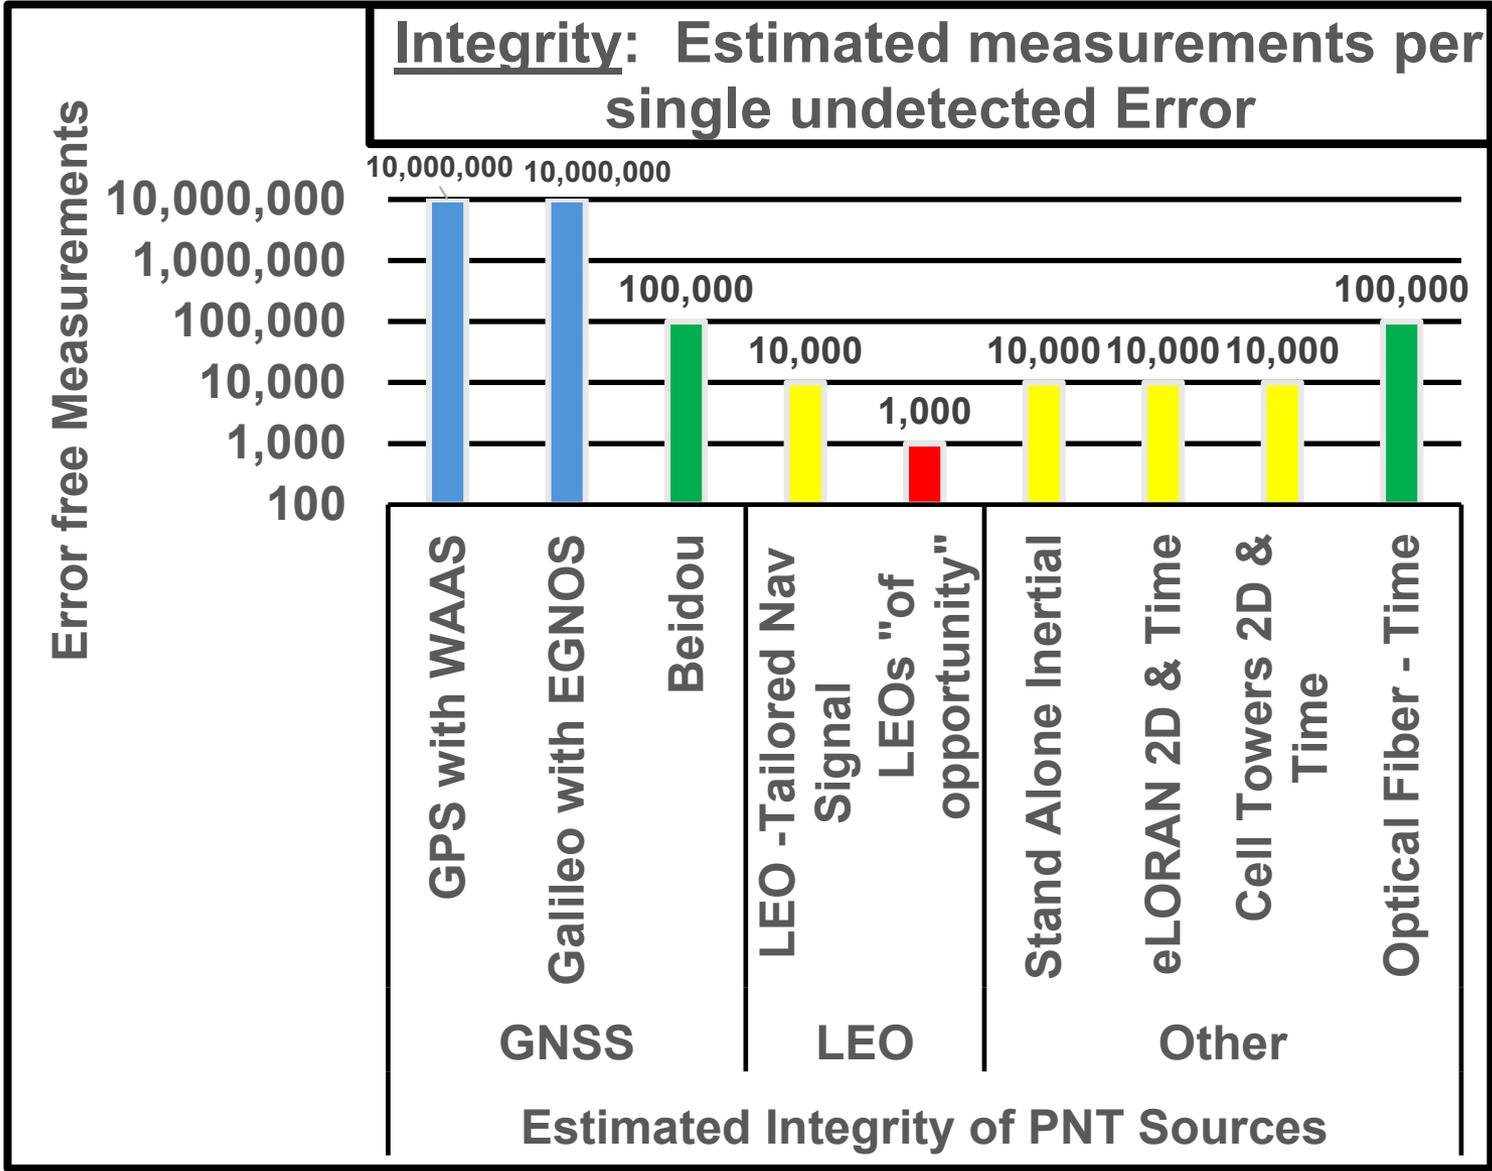


Estimated Horizontal Accuracy of PNT Sources for Dynamic Users (Meters- 95th Percentile)

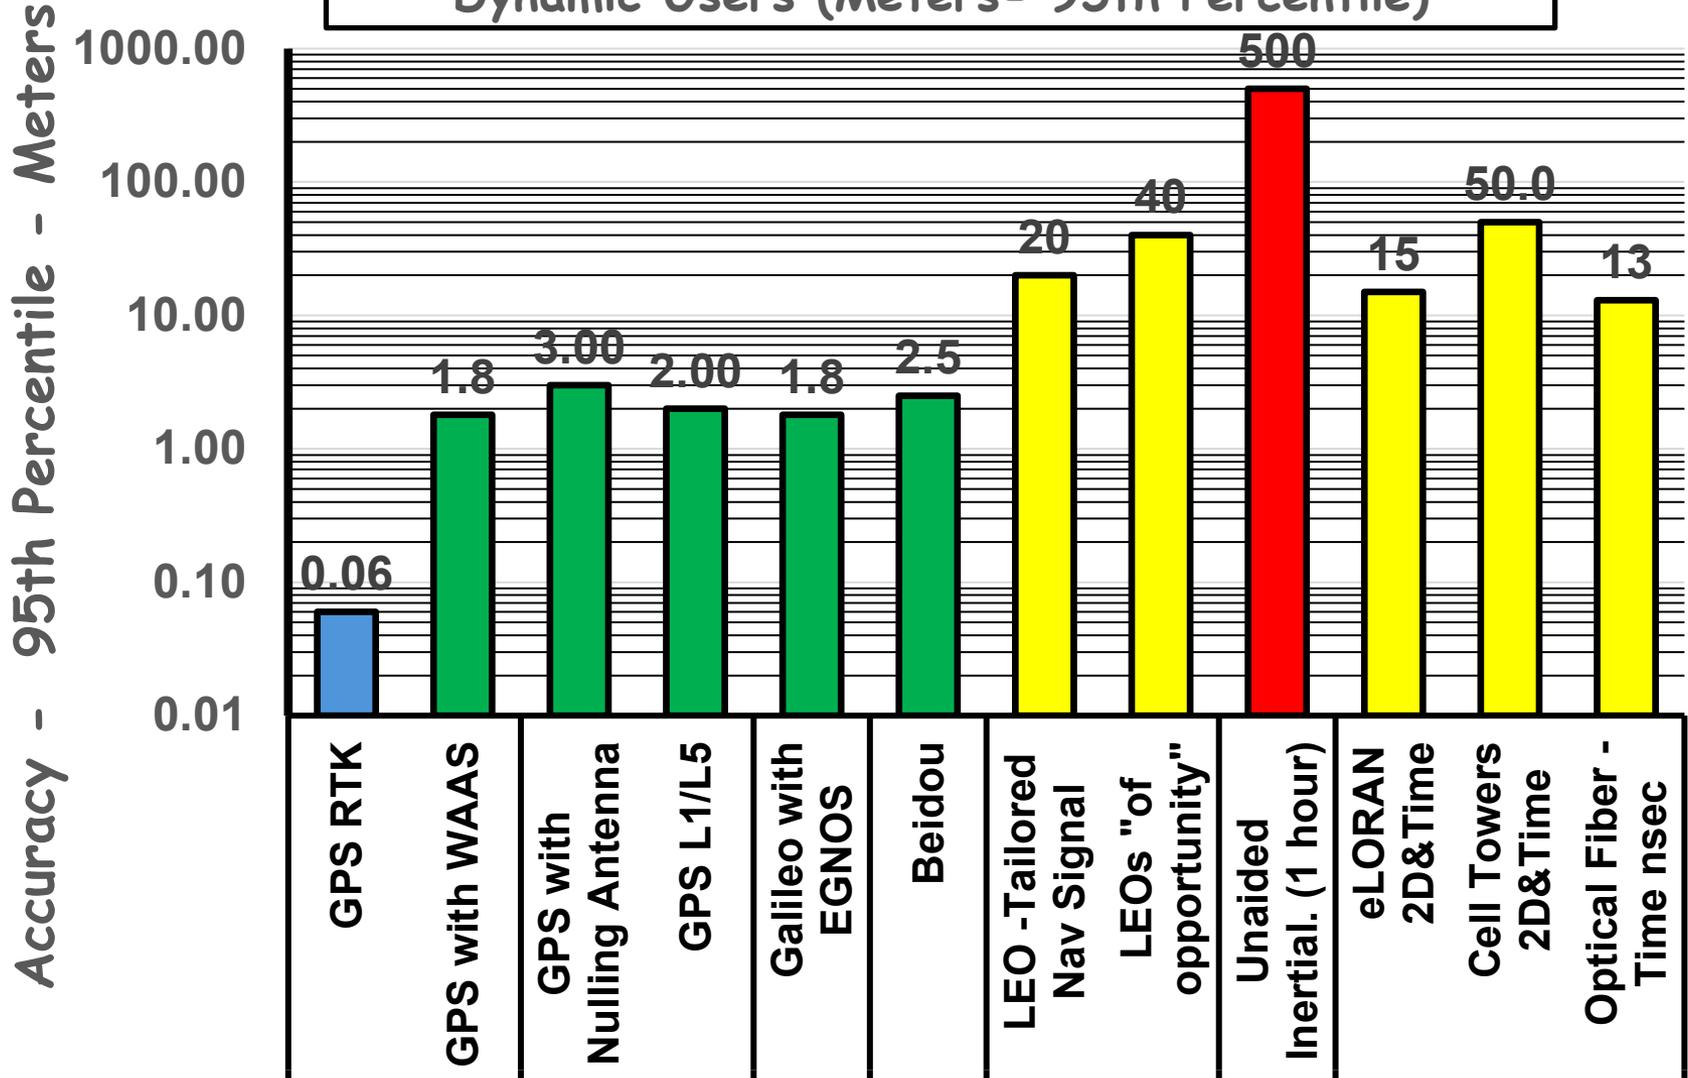

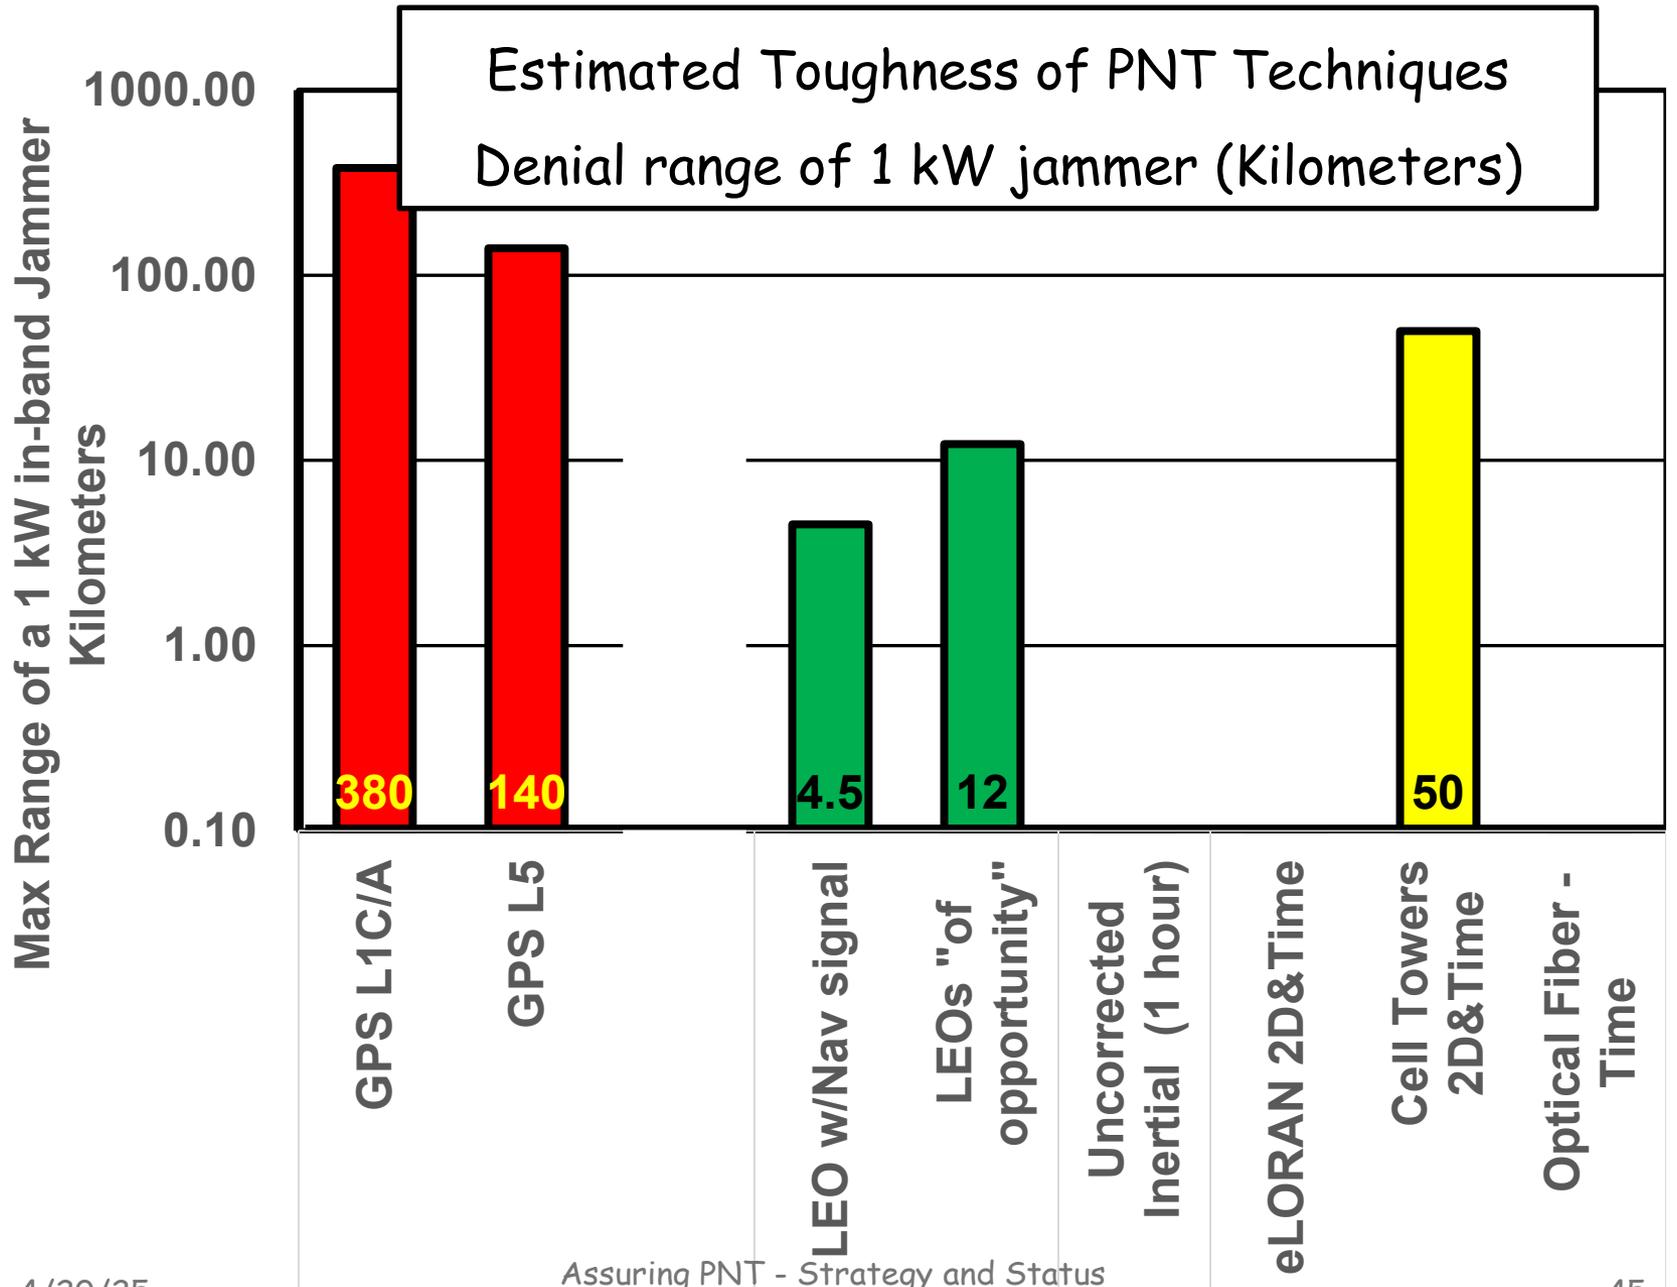

Estimated Toughness of PNT Sources Adding GPS "Toughening" that was demonstrated 47 years ago...

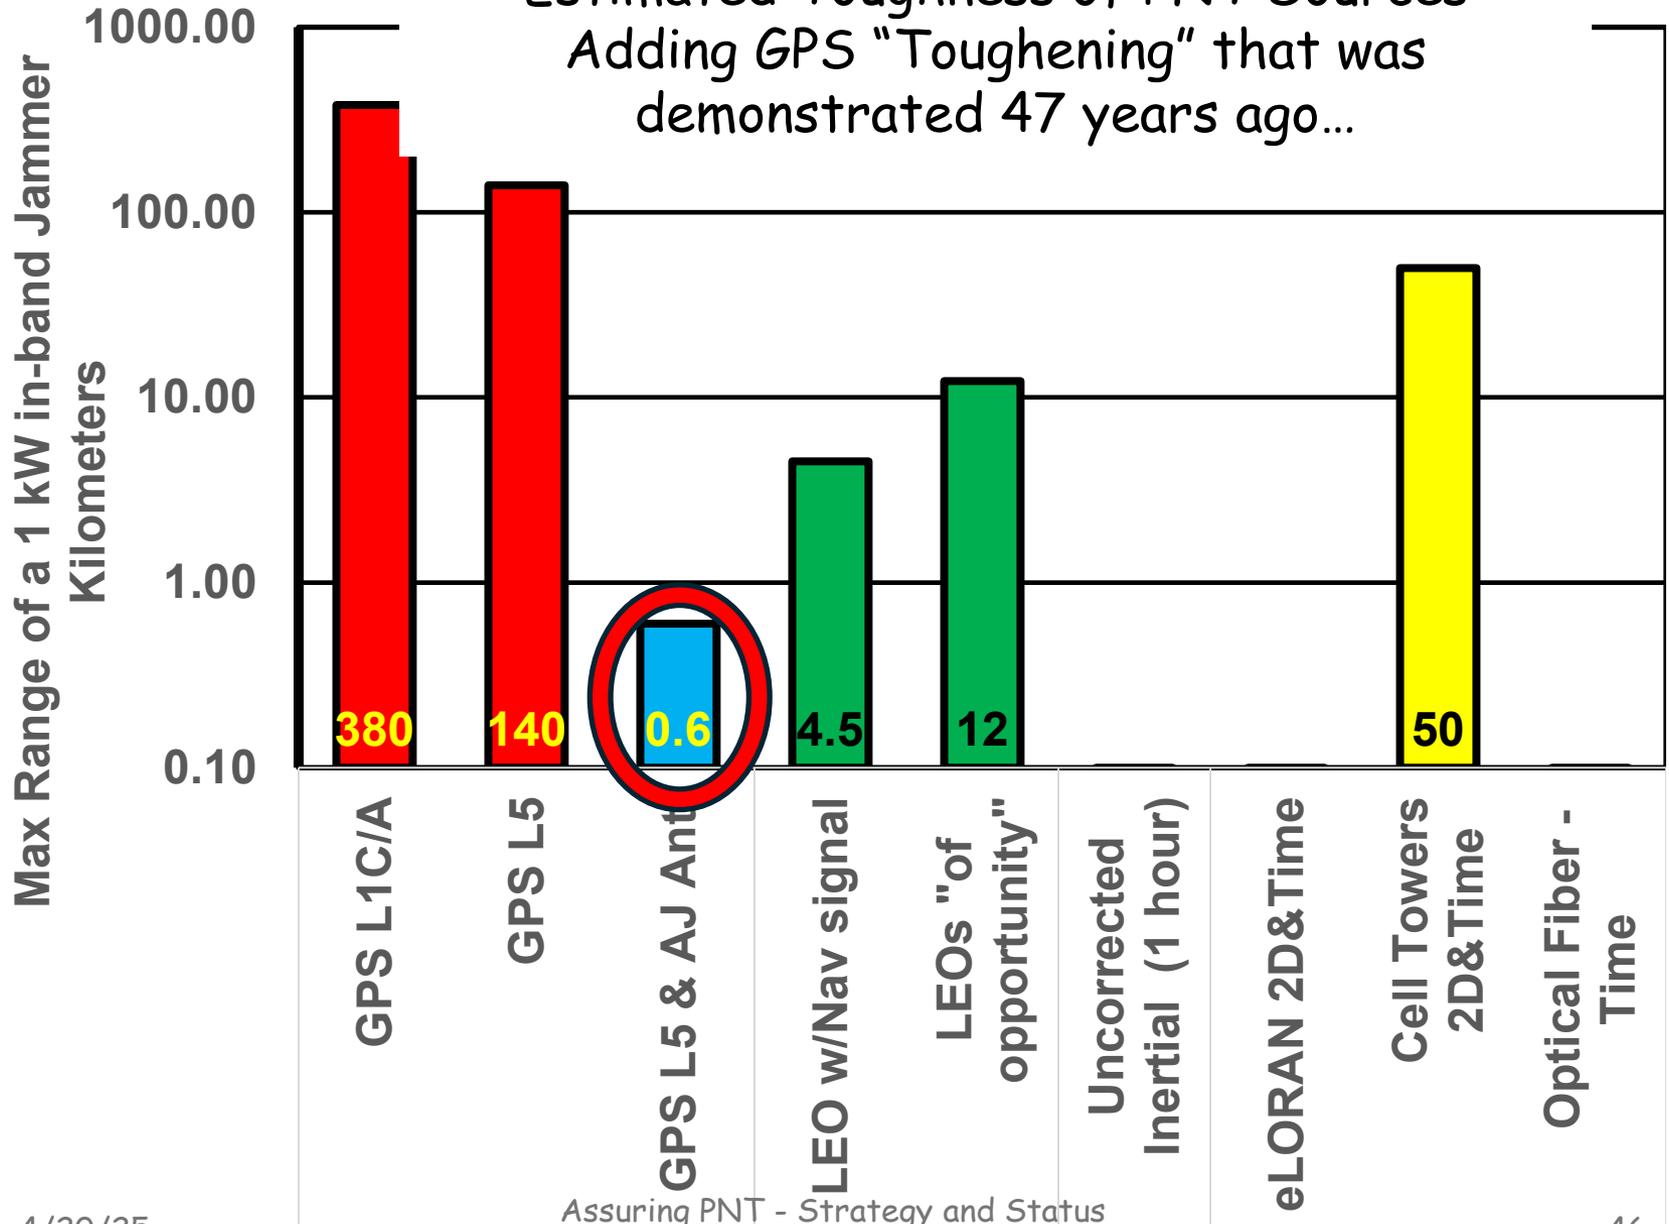

Summarizing GPS and Augmentations

Capabilities of Alternative PNT Sources

		Capabilities of Alternative PNT Sources									
		GNSS				LEO		Other			
PNT CATEGORIES	Discriminators	GPS + WAAS	GPS+ WAAS w/Phased antenna	Galileo + EGNOS	Beidou	LEO - Tailored Nav Signal	LEOs "of opportunity"	Stand Alone Inertial	eLORAN 2D & Time	Cell Towers 2D & Time	Optical Fiber - Time
A	3D, Dynamic, 6 cm	Local Base Stat	Local Base Stat	Local Base Stat	Local Base Stat						
B	3D, Dynamic, 2.5 m								Not Contenders		
C	3-D, Dynamic, 30 m					2D, 20m	2D (?) 30M	2D, 0.5 km/hr	2D, 15M Local		
S	3-D, Static, 0.1 mm			?	?						
T	Common View or UTC					100 to 200 nsec	Unknown				
KEY		Meets Req. including 1 kW Jammer	Meets Req., except resisting 1 kW Jammer	Initially Meets Req., but degrades w/time		Meets <u>2D</u> req. in Local Region		Does not meet Category Req.		Not a Contender	

Capabilities of Alternative PNT Sources

		GNSS				LEO		Other			
PNT CATEGORIES	Discriminators	GPS + WAAS	GPS+ WAAS w/Phased antenna	Galileo + EGNOS	Beidou	LEO - Tailored Nav Signal	LEOs "of opportunity"	Stand Alone Inertial	eLORAN 2D & Time	Cell Towers 2D & Time	Optical Fiber - Time
A	3D, Dynamic, 6 cm	Local Base Stat	Local Base Stat	Local Base Stat	Local Base Stat						
B	3D, Dynamic,								Not Contenders		
C	3-D, Dynamic, 30 m					2D, 20m	2D (?) 20M	2D, 0.5 km/hr	2D, 15M		
S	3-D, Static, 0.1 mm			?	?						
T	Common View or UTC					100 to 200 nsec	Unknown				
COMMENTS											
KEY	Meets Req. including 1 kW Jammer	Meets Req., except resisting 1 kW Jammer	Initially Meets Req., but degrades w/time	Meets 2D req. in Local Region	Does not meet Category Req.	Not a Contender					

Capabilities of Alternative PNT Sources

PNT CATEGORIES	Discriminators	GNSS				LEO		Other			
		GPS + WAAS	GPS+ WAAS w/Phased antenna	Galileo + EGNOS	Beidou	LEO - Tailored Nav Signal	LEOs "of opportunity"	Stand Alone Inertial	eLORAN 2D & Time	Cell Towers 2D & Time	Optical Fiber - Time
A	3D, Dynamic, 6 cm	Local Base Stat	Local Base Stat	Local Base Stat	Local Base Stat						
B	3D, Dynamic, 2.5 m							Not Contenders			
C	3-D, Dynamic, 30 m					2D, 20m	2D (?) 30m	2D, 0.5 sec	2D, 15M	?	
S	3-D, Static, 0.1 mm			?	?				Local		
T	Common View on UTC					100 to 200 nsec	Unknow		UTC: 100 nsec		
COMMENTS											
KEY	Meets Req. including 1 kW Jammer	Meets Req., except resisting 1 kW Jammer	Initially Meets Req., but degrades w/time	Meets 2D req. in Local Region	Does not meet Category Req.	Not a Contender					

Summary 1: Assured PNT

- The degree of "Assurance" is driven by both the PNT technique and the user-class requirements.
- We have defined 5 broad PNT categories:
ABCST
- Major discriminators are the old favorites: Accuracy, Availability/Coverage.
- Also critical for many are: Integrity and Robustness to Jamming

Summary 2: Assured PNT some emphasized points...

- **Integrity** of better than one undetected (HMI) fault in more than 1,000,000 is required for many safety of life PNT applications.
(e.g. Train Control, autonomous cars, aircraft Landing, etc.)
- Only **GNSS-type space systems** have demonstrated Cat A&B PNT.
 - 24/7 worldwide dynamic accuracy to better than 5 cm (RTK) and Integrity: undetected Faults < 1 in 10,000,000 with WAAS)
- **LEO Augmentations** demonstrate reduced susceptibility to jamming and much better penetration of structures, ~ **jammer range about 3% of Raw GPS** they ~ meet PNT Category C, but usually in 2D. *Can meet many Category T requirements.*
 - Full 3-D LEO with accuracy probably requires 250 to 300 satellite constellation. Doppler would reduce the required constellation size, but with reduced accuracy.
- **Time Synchronization** is an important PNT application. GPS can be augmented with a variety of systems (eLORAN, LEO, TV, optical cable...), depending on requirements. Most trace back to UTC through GPS.
- **eLORAN** has **2-dimensional** accuracy potentially 10 to 25m, in local Differential region and time transfer 1.0 to 0.1 microsec. (Probably Unjammable.)
- **Toughened GPS** with phased array antennas has demonstrated *reduced range susceptibility to jammer of better than **0.2% of Raw GPS***
(e.g. a 1 kW jammer range < 2500 feet)

Conclusions/Recommendations: PTA

- **Protect**: Efforts to protect GNSS Spectrum should be a high priority effort of US Government
 - Need stronger central direction and resources
 - Proposed goal: pinpointing interference within 2 hours
- **Toughening**: With phased-array antennas, GPS resistance to jammer power can be increased by factors of 100,000 or more - decreasing jammer range by up to 99.7%. This largely exceeds the natural toughening of LEO supplements. The ITAR restriction on these antennas must be totally removed.
- **Augment**: US should continue to pursue promising systems, while recognizing that *none have demonstrated capability to meet PNT Categories A and B*. In addition, time to achieve full augmentation likely exceeds 5 to 10 years. Many will require government sponsorship to close the business case.

Thank You

- Questions?